











teyronTM
ABS Doors

ABOUT US

Teyron industries is a leading manufacturer of premium ABS doors, crafted to meet the evolving demands of modern construction and climate challenges. Our doors provide comprehensive solutions for private homes, residential apartments and commercial establishments. With a steadfast commitment to innovation and sustainability, we ensure our products are both durable and environmentally friendly.

All our products are manufactured at our facility in Kochi, Kerala, utilizing the most advanced machinery to guarantee exceptional precision, quality, and innovation.

| Why Choose Us | Teyron Prehung Doors | Other Prehung Doors |
|-----------------------|---|---|
| Water Proof |  |  |
| Termite Proof |  |  |
| Expansion & Shrinkage |  |  |
| No Paint No Polish |  |  |
| Easy To Clean |  |  |



YA-720

Waterproof and Terminate
proof Durability for Any Space

| units : mm | | | |
|------------|-----------|-----------|-----------|
| Model | Thickness | Width | Height |
| YA-720 | 35 | upto 1020 | upto 2400 |

Applicable Colour



Teak

Dark Walnut

White




YA-720
Teak



YA-720
Teak

Embossed Design

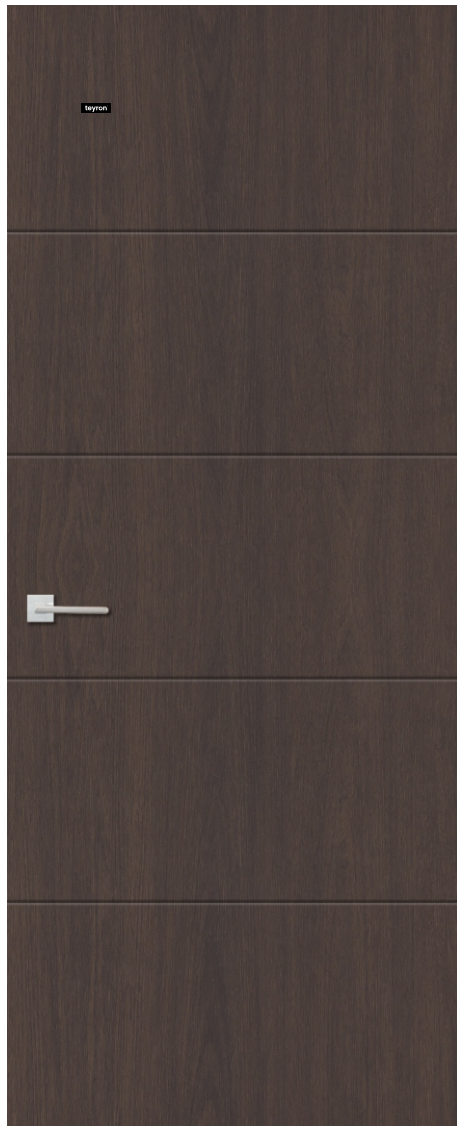

YA-706



YA-706

Quality Excellence: Committed to producing doors that meet the highest standards of durability, aesthetics, and functionality.

Applicable Colour



Walnut



Dark Walnut



| units : mm | | | |
|------------|-----------|-----------|-----------|
| Model | Thickness | Width | Height |
| YA-706 | 35 | upto 1020 | upto 2400 |

Embossed Design



YA-716



YA-716

Innovation: Continuously pushing the boundaries of design and technology to offer cutting-edge door solutions that cater to modern-day needs.

Applicable Colour



Teak



Rose Wood

units : mm

| Model | Thickness | Width | Height |
|--------|-----------|----------|-----------|
| YA-716 | 35 | upto 930 | upto 2130 |

Two Tone Design



Our ABS doors featuring exquisite two-tone accents.

Applicable Colour



Teak


Dark Walnut

Rose Wood

Walnut

units : mm

| Model | Thickness | Width | Height |
|--------|-----------|-----------|-----------|
| YA-708 | 35 | upto 1100 | upto 2500 |

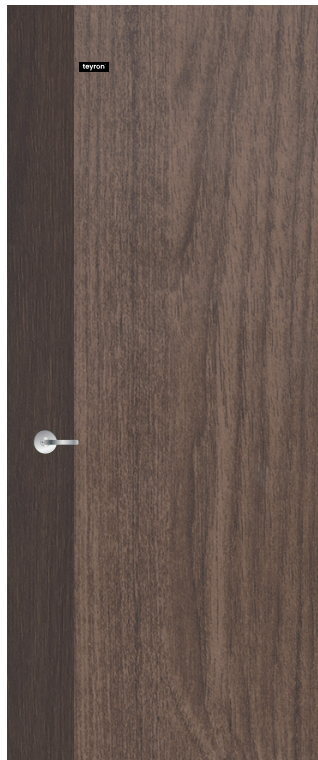


YA-708




YA-1001

Steel Beading Design

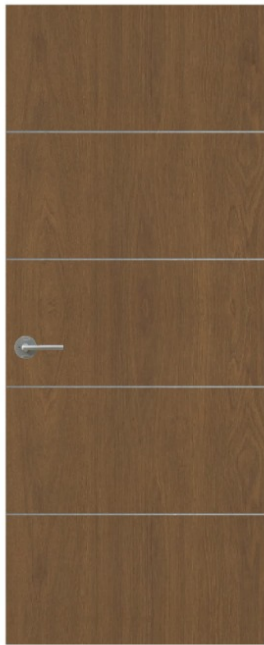

STL004 Teak

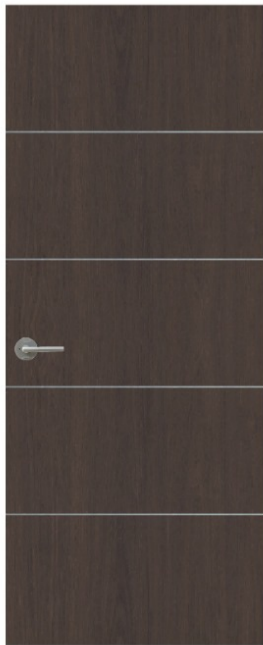

STL004 Walnut



STL004 Rosewood



STL004 light Walnut

Groove design as per customer choice



YAL-110



YAL-111



YAL-112


| units : mm | | | |
|------------|-----------|-----------|-----------|
| Model | Thickness | Width | Height |
| STL004 | 35 | upto 1100 | upto 2500 |

Glass Panel Doors

ABS

Premium ABS Doors

These doors are ideal for a wide range of applications including Schools, office cabins, hospitals, and pantries offering both style and functionality in various settings.

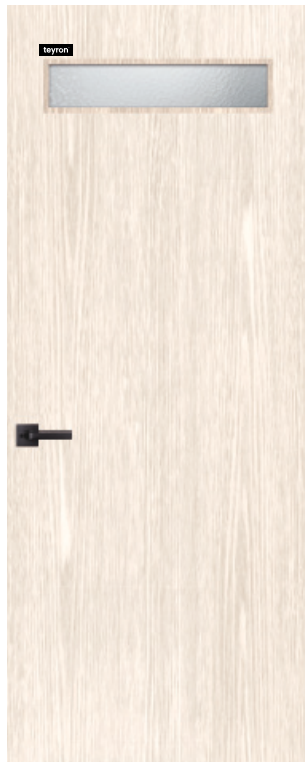

YAT-810



YAT-826



YAT-826

| units : mm | | | |
|------------|-----------|-----------|-----------|
| Model | Thickness | Width | Height |
| YAT-810 | 35 | upto 1100 | upto 2500 |

Georgian bar glass doors



YAT-903



YAT-841

Applicable Colour



Teak

Dark Walnut

Rose Wood


Walnut

units : mm

| Model | Thickness | Width | Height |
|---------|-----------|-----------|-----------|
| YAT-841 | 35 | upto 1100 | upto 2500 |




YAT-841

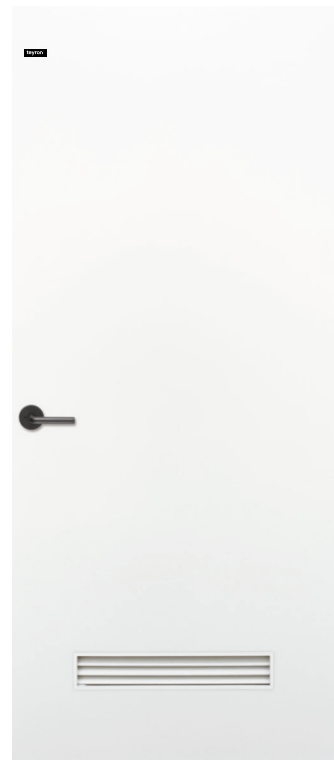

YAT-841

Surface treatment Deco-Sheet

Finishing of designated deco sheets in various colours and pattern

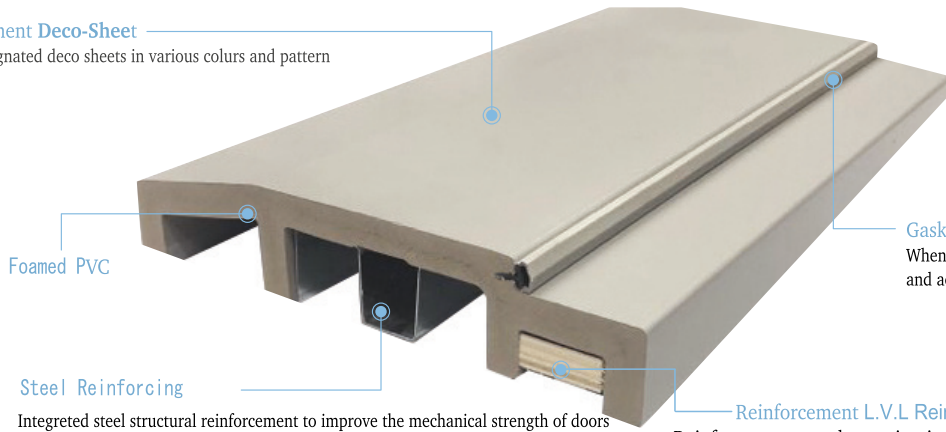

Gasket





When the door is closed, it relieves and noise and acts As a soundproofing indulgence.

Steel Reinforcing


Integreted steel structural reinforcement to improve the mechanical strength of doors

Reinforcement L.V.L Reinforcing

Reinforcement wood to maintain hinge screw tightening force and improve durability when opening and closing the door curtain

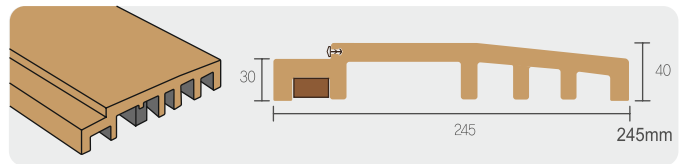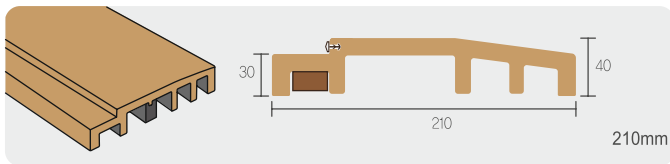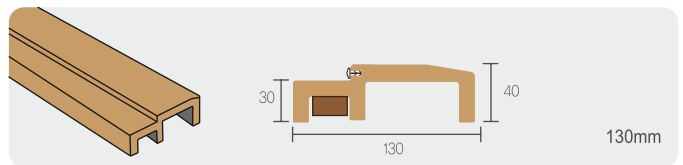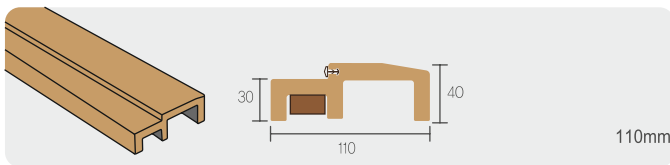

Architrave

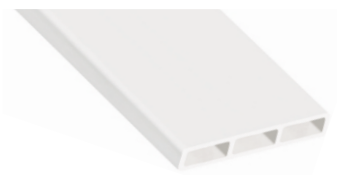

PVC (60×9mm)

These are new concept doors that maximize wind and soundproofing effects by fixing gaskets to the doors, reduce noise generated when the door is closed, and increase safety by absorbing shock.

Gasket colors (Gaskets in four colors: black, wash oak, white, and gray are produced to match the finishing colors of the doors.)



Black



Brown



White



Grey

Concealed sliding door




LA-400 (ABS)

This is a sliding product with no exposed rails, allowing for a clean look as no hardware is visible. This product provides stability and convenience by applying a two-way damping stopper.



YA-001

Installation Diagram

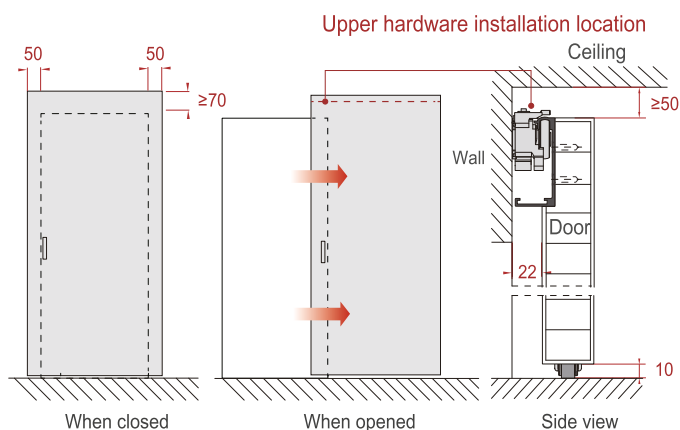

Door size: 740~1,100(W)×2,380(H) or less, thickness 35(T)

※ The width of the door must be 100mm larger than the opening size and the height must be at least 70mm.

※ Installation is possible only when there is a clearance of 50mm or more from the top of the door to the ceiling.

※ There must be a clearance of 22mm or more between the wall and the door to avoid operating problems.

※ The handle will be installed inside the normal position due to interference with the opening, so please consult when ordering.

※ The maximum load of the hanger rail is 80kg



YV-04

YHF-002

Exposed hanger rail line type

Type A



Type B



Two-way damper can be applied to door widths of 850mm or more.

- A minimum height of 300mm or more is required for free space between the ceiling and the top of the door.

- Hanger rail length is fixed at 2,000mm (cutting is not possible) and maximum load is 40kg

Heimman's strict standards make it safer and healthier.

ECO-FRIENDLY

We pursue eco-friendliness

Yelim interior film Heim meets certified eco-friendly standards.
It is a non-toxic, eco-friendly product using raw materials and adhesives that are harmless to the human body.

Harmful heavy metals
(Pb, Cd, Hg, Cr⁶⁺)

1,000 mg/kg
under

VOCs
(Five major compounds
including toluene)

0.10 mg/m³h
under

HCHO, CH3CHO
(formaldehyde, acetaldehyde)

0.015 mg/m³h
under

- It is safe as no heavy metals (lead, cadmium, mercury, hexavalent chromium, etc.) harmful to the human body are detected.
- Formaldehyde (HCHO), a substance that causes sick building syndrome, is not released.
- Volatile organic compounds (VOCs, toluene, etc.) that are harmful to the environment by producing odors or ozone have been minimized.
- It has excellent antibacterial and anti-fungal properties, helping to maintain a comfortable surrounding environment.

Certification mark





TEST REPORT

Think about safety

This product has passed the strict flame retardant performance test of the National Institute of Fire Protection, South Korea.

| Heavy metals [Pb, Cd, Hg, CrVI] | | Formaldehyde = [HCHO] | | Flame retardant performance [Certified by the National Institute of Fire Protection] | |
|--|--------------|--|--------------|---|--------------------------------------|
| <p>standard</p> <p>[Pb] 5mg/kg [Cd] 0.5mg/kg [Hg] 2mg/kg [CrVI] 1mg/kg</p> | Not detected | <p>standard</p> <p>0.12mg/m³h</p> | Not detected | <p>Carbonization length: 20cm or less</p> <p>Carbonization area less than 30cm²</p> <p>Afterflame time 3 seconds or less</p> <p>Remaining time less than 5 seconds</p> <p>Smoke density 200 Ds</p> | Flame retardant certification report |



[TVOC / Toluene / Formaldehyde detection test]



[Heavy metal test]



[Phthalate test]



[Antibacterial test]

※ Product report reports, construction nomination forms, and construction manuals can be obtained by contacting the head office or agent

Priority Dealer



Mob : +91 9447701742, +91 7025257800

Thiruvanchoor - Kottayam Near Thiruvanchoor Temple